

# MULTICOM BOSCH

SURETEK PRODUCT #MCB4G

## Dual Carrier Communicator for Bosch Solution 2000/3000 panels

### Multicom LTE

- Connects Bosch Solution 2000/3000 panels to Alarm Monitoring Centres
- Uses multiple carriers on highly secure 4G LTE Cat.1 network
- Mounts easily into Alarm Panel using purpose built mounting bracket

### Key features:


Designed for integration with Bosch alarm panels

Serial link to Bosch Solution 2000/3000 panels

Meets the AS2201.5 Class 4 Australian Standard

Program with Bosch A Link, built into TechTools

Automatic remote software updates to your Multicom

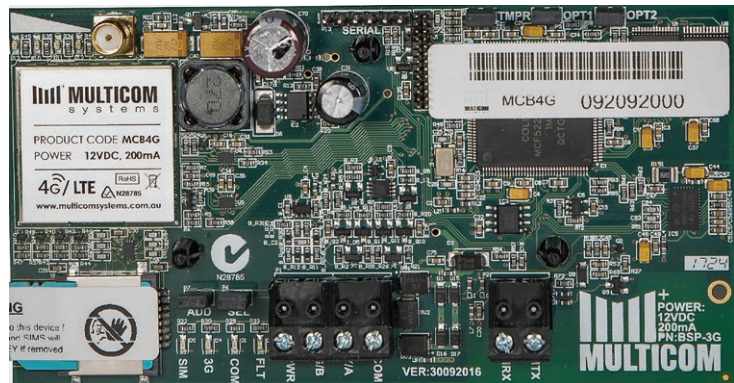

Low Power Consumption



### TechTools

TechTools allows you to instantly configure and manage Multicom devices from your PC, Apple or Android device. TechTools Web Portal: [techtools.suretek.com](http://techtools.suretek.com) Download the App at [multicom.support/techtools](http://multicom.support/techtools)

### Bosch A Link in TechTools

The Bosch A Link, Upload / Download software, is built into Tech Tools, enabling you to program the Bosch alarm panel through the Multicom Alarm Communicator



### AlarmLINK

Empower your customers. Promote your brand. Install Multicom devices and provide your customers with a free smartphone app featuring your logo and colours! Download at [multicom.support/alarmlink](http://multicom.support/alarmlink)



### CAMS Integration

Multicom is now fully integrated into CAMS (Complete Asset Monitoring System). This enables Operator Interaction with your clients Multicom Devices.

### OPTIONS AVAILABLE

#### Additional High Gain antennas with cable available for the Multicom Bosch

Connection:  
SMA

3 cable lengths:  
2, 5 or 10 metres

Antenna Colours:  
Black in stock, White by order



Proudly distributed by



[www.suretek.com.au](http://www.suretek.com.au)

# MULTICOM BOSCH

## MORE FEATURES

- Compliant to the 3GPP Release 10, LTE FDD Cat.1, communication standards
- Fully managed network with guaranteed 99.99% uptime
- 24/7 Partner tech support Australia-wide

## TECHNICAL SPECIFICATIONS

PRODUCT FEATURES	
Communication Paths	*4G *LTE *Cat.1
Reporting Format	Contact ID Surepoll
Inputs	Serial connection to the Bosch Alarm Panel
Carrier Options	Single or Dual
Power	8-15V DC
Power Consumption	Standby <90mA @ 13.8V DC Transmitting <130mA @ 13.8V DC
Approval	N28785

OPERATIONAL FEATURES	
Alarm Reporting	Connection and Power Fault Test Report Programming Update / Access All Bosch Solution Alarms + Bus Fault Notification
Upload / Download software	Yes

POLLING PLAN	
Polling Plan	Class 2 Class 3 Class 4

HOUSING	
Dimensions	Circuit board with mounting bracket 125 x 65 x15 (mm)

WARRANTY	
Warranty	3 years (Lifetime Warranty is available to Multicom Partners)



### MULTICOM BOSCH INSTALL GUIDE



Proudly distributed by



www.suretek.com.au