

MULTICOM BOSCH

SURETEK PRODUCT #MCB4G

Dual Carrier Communicator for Bosch Solution 2000/3000 panels

Multicom LTE

- Connects Bosch Solution 2000/3000 panels to Alarm Monitoring Centres
- Uses multiple carriers on highly secure 4G LTE Cat.1 network
- Mounts easily into Alarm Panel using purpose built mounting bracket

Key features:


Designed for integration with Bosch alarm panels

Serial link to Bosch Solution 2000/3000 panels

Meets the AS2201.5 Class 4 Australian Standard

Program with Bosch A Link, built into TechTools

Automatic remote software updates to your Multicom

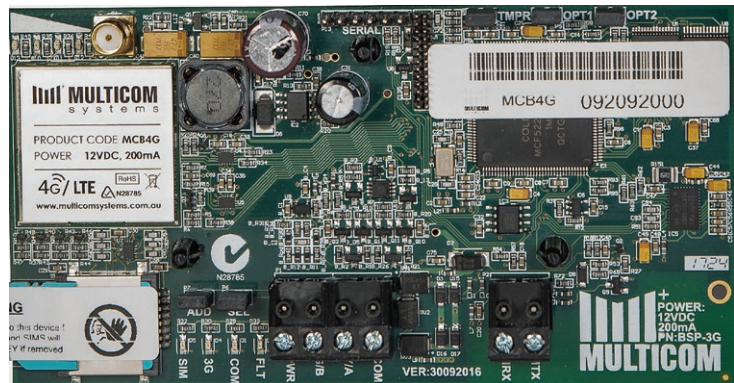

Low Power Consumption



TechTools

TechTools allows you to instantly configure and manage Multicom devices from your PC, Apple or Android device. TechTools Web Portal: techtools.suretek.com Download the App at multicom.support/techtools

Bosch A Link in TechTools

The Bosch A Link, Upload / Download software, is built into Tech Tools, enabling you to program the Bosch alarm panel through the Multicom Alarm Communicator



AlarmLINK

Empower your customers. Promote your brand. Install Multicom devices and provide your customers with a free smartphone app featuring your logo and colours! Download at multicom.support/alarmlink



CAMS Integration

Multicom is now fully integrated into CAMS (Complete Asset Monitoring System). This enables Operator Interaction with your clients Multicom Devices.

OPTIONS AVAILABLE

Additional High Gain antennas with cable available for the Multicom Bosch

Connection:
SMA

3 cable lengths:
2, 5 or 10 metres

Antenna Colours:
Black in stock, White by order



Proudly distributed by



www.suretek.com.au

MULTICOM BOSCH

MORE FEATURES

- Compliant to the 3GPP Release 10, LTE FDD Cat.1, communication standards
- Fully managed network with guaranteed 99.99% uptime
- 24/7 Partner tech support Australia-wide

TECHNICAL SPECIFICATIONS

PRODUCT FEATURES	
Communication Paths	*4G *LTE *Cat.1
Reporting Format	Contact ID Surepoll
Inputs	Serial connection to the Bosch Alarm Panel
Carrier Options	Single or Dual
Power	8-15V DC
Power Consumption	Standby <90mA @ 13.8V DC Transmitting <130mA @ 13.8V DC
Approval	N28785

OPERATIONAL FEATURES	
Alarm Reporting	Connection and Power Fault Test Report Programming Update / Access All Bosch Solution Alarms + Bus Fault Notification
Upload / Download software	Yes

POLLING PLAN	
Polling Plan	Class 2 Class 3 Class 4

HOUSING	
Dimensions	Circuit board with mounting bracket 125 x 65 x15 (mm)

WARRANTY	
Warranty	3 years (Lifetime Warranty is available to Multicom Partners)



MULTICOM BOSCH INSTALL GUIDE



Proudly distributed by



www.suretek.com.au